The following upgrade instructions are in relation to updating the firmware by copying an update file to the SD Card via the supplied USB cable. Our Dash Cams can also be updated via MyNextbase Player® (NBDVR222 and above).

Windows	Mac
Download Here	Download Here

1. Download the latest version of firmware for the NBDVR222X via the Support & Downloads page for your Dash Cam.

2. The firmware update will be saved to your PC as a file called 'FW222XA. This will usually be located within the downloads folder on your computer.

   Note: You won't be able to open this file on your computer.

FWXXXX.bin

FWXXXX.bin

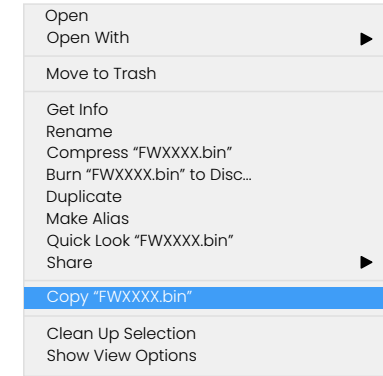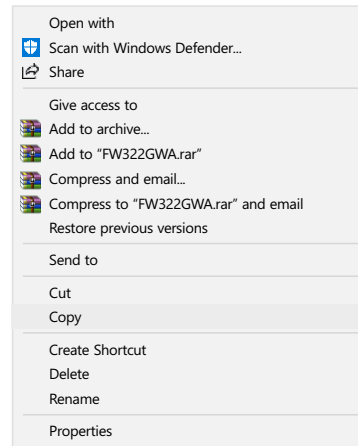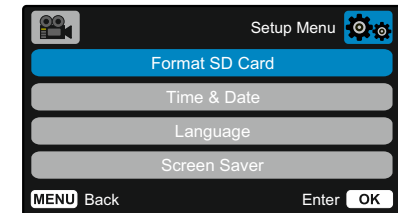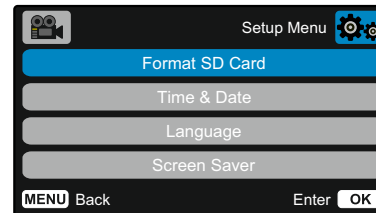**3** Right click (CMD & click if using a mac) on the bin file inside the downloads folder and select the option that says 'Copy'.

```
            Open with
    ⊞       Scan with Windows Defender...
    ⏎       Share

            Give access to
    ▤       Add to archive...
    ▤       Add to "FW322GWA.rar"
    ▤       Compress and email...
    ▤       Compress to "FW322GWA.rar" and email
            Restore previous versions

            Send to

            Cut
            Copy

            Create Shortcut
            Delete
            Rename

            Properties
```

```
    Open
    Open With                          ▶

    Move to Trash

    Get Info
    Rename
    Compress "FWXXXX.bin"
    Burn "FWXXXX.bin" to Disc...
    Duplicate
    Make Alias
    Quick Look "FWXXXX.bin"
    Share                              ▶

    Copy "FWXXXX.bin"

    Clean Up Selection
    Show View Options
```
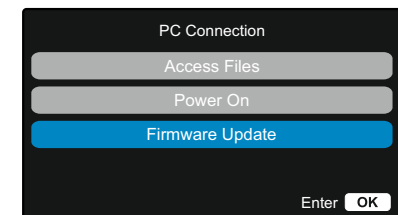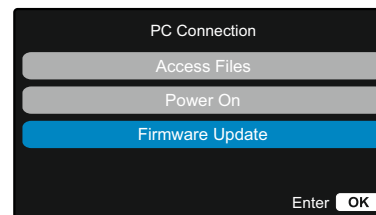
4 Go to the Dash Cam Setup Menu (Press the Menu button twice when the camera is not recording) and select the option that says Format SD Card', press the 'OK' button to confirm.
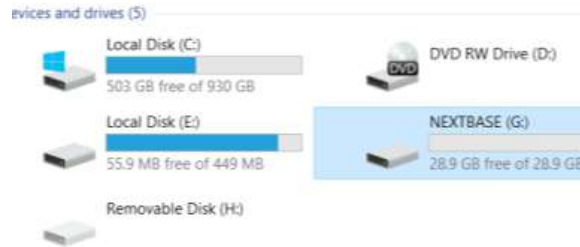
```
    📷                  Setup Menu   ⚙
            Format SD Card
            Time & Date
            Language
            Screen Saver
    MENU  Back              Enter  OK
```

```
    📷                  Setup Menu   ⚙
            Format SD Card
            Time & Date
            Language
            Screen Saver
    MENU  Back              Enter  OK
```

5 Plug the Dash Cam into your Desktop using the supplied USB cable and press the 'OK' button to select the 'Firmware Update' option.

```
              PC Connection
            Access Files
            Power On
            Firmware Update

                       Enter  OK
```

```
              PC Connection
            Access Files
            Power On
            Firmware Update

                       Enter  OK
```
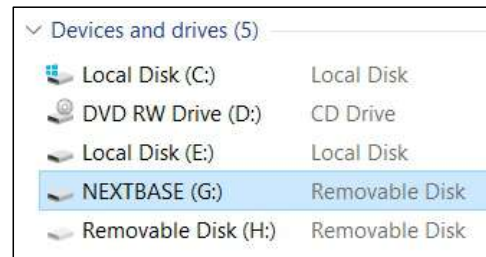
6 The Dash Cam should the appear as a storage device called 'NEXTBASE' within File Explorer (Windows) or Finder (Mac).
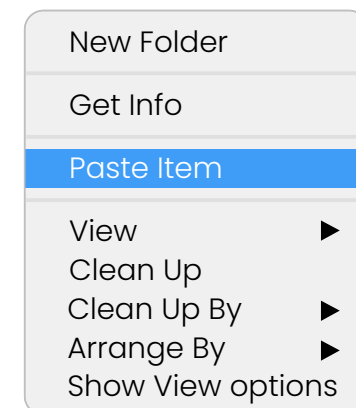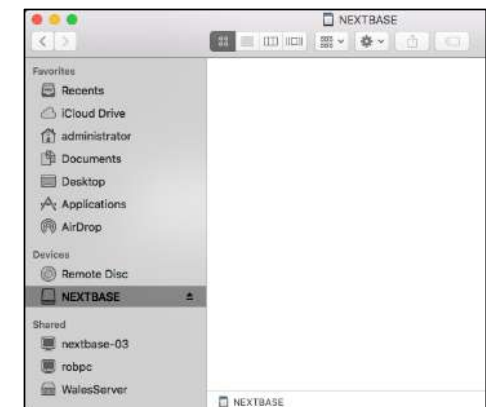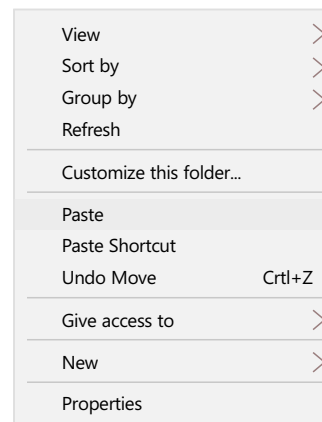

7 Click on your SD card as it appears within File Explorer/Finder to view the contents of the card.

8 Once the contents of the card are displayed, right click in the white space and select the option that says 'Paste'.
This will copy the file from your downloaded zip file and place it onto the SD card where it can be read by the Dash Cam.

9 Please ensure that the bin file is NOT renamed in anyway, the update will fail if the file appears as FW222XA(1).bin, for example.
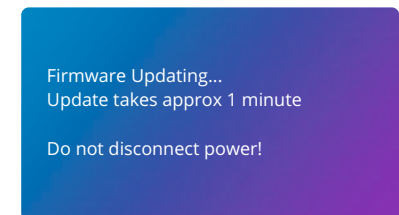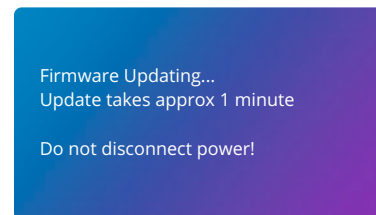
FWXXXX.bin

FWXXXX.bin

10 Once you have copied 'FW222XA.bin' to the Dash Cam you can now unplug the Dash Cam from your PC. It will shut down and you will see the Nextbase logo.
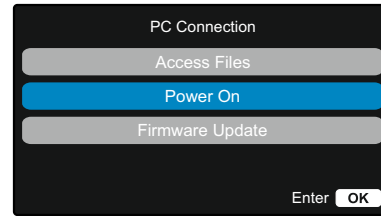
NEXTBASE

NEXTBASE

11 After the Dash Cam has shut down completely, plug it back into your PC and select 'Power On'.
The update should begin automatically.

Firmware Updating...
Update takes approx 1 minute

Do not disconnect power!

Firmware Updating...
Update takes approx 1 minute

Do not disconnect power!

12 After the update has installed your Dash Cam will restart and display the PC Connection Screen.
Select the 'Power On' option using the 'OK' button to continue.

| PC Connection |
| Access Files |
| Power On |
| Firmware Update |

Enter **OK**

| PC Connection |
| Access Files |
| Power On |
| Firmware Update |

Enter **OK**

13 After the Dash Cam has restarted open the Setup Menu (by pressing the 'Menu' button twice) and scroll down to 'System Info'. Press the 'OK' button to select this option and the Firmware version will be displayed.

System Info
Model: 222X
Firmware: Rxx.x
Serial No: 123456789
FCC ID: 2AOT9-NBDVR222X
Battery Status: Charging

● ○ ○

System Info
Model: 222X
Firmware: Rxx.x
Serial No: 123456789
FCC ID: 2AOT9-NBDVR222X
Battery Status: Charging

● ○ ○